Truck Crane AK 36/4000




Permissible gross vehicle weight (t)	11,99
——————————————————————————————————————	2.000 (optional 4.000)
Max. extension length (m)	36,0
Working height up to boom (m)	24,2
Boom extendable (m)	5,2 / 8,3 / 11,3
Boom payload (kg)	2.000 / 1.000 / 700
Main mast angle (degrees)	85
Boom angle (degrees)	160
Pivoting range (degrees)	+/- 310
Hook speed (m/min)	45 (55)
Range for crane operation at 250 kg (m)	30,0
Range for crane operation at 500 kg (m)	24,0
Range for crane operation at 1 t (m)	16,0
Range for crane operation at 2 t (m)	8,0
Range for crane operation at 4 t (m)	4,0
Range for crane operation at 6 t (m)	-
Range for crane operation at 12 t (m)	-
Range for platform operation with rotating basket (m)	23,5 at 250 kg 26,0 at 100 kg
Range for platform operation with non-rotating basket (m)	24,5 at 250 kg 26,8 at 100 kg
Norking height with rotating basket max. (m)	32,7
Vorking height with non-rotating basket max. (m)	34,0


The powerful and multi-functional AK 36/4000 is characterized by impressive working ranges and high loads on a compact 11.99 t chassis. Despite its low weight, this crane reaches a maximum radius of 16 m with a load of 1000 kg. In addition to that it impresses by its excellent price-performance ratio.

The specific design of our AK 36/4000 reduces the slew radius to a minimum. Therefore it can also be set up at the side of the road while the traffic is still running. Like all other Böcker cranes, the AK 36/4000 can accurately telescope in and out with a load thanks to its strong aluminium boom.




Working range crane operation



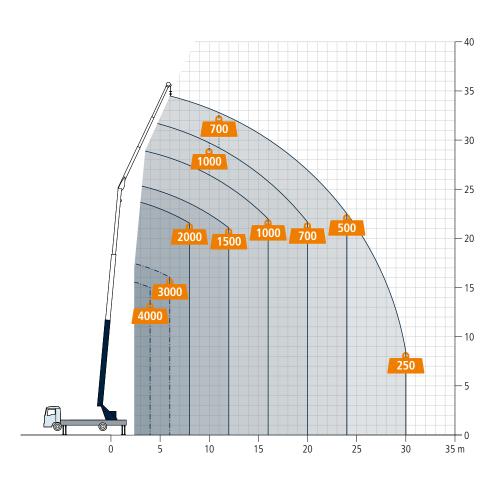


Working range platform operation

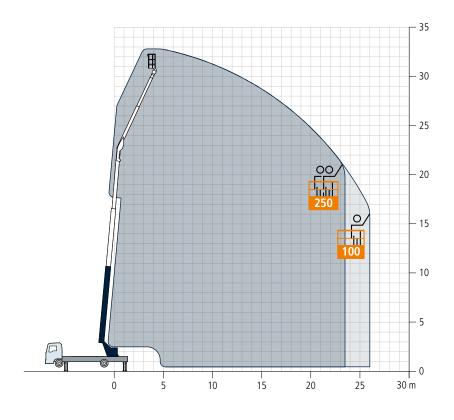

Dimensions



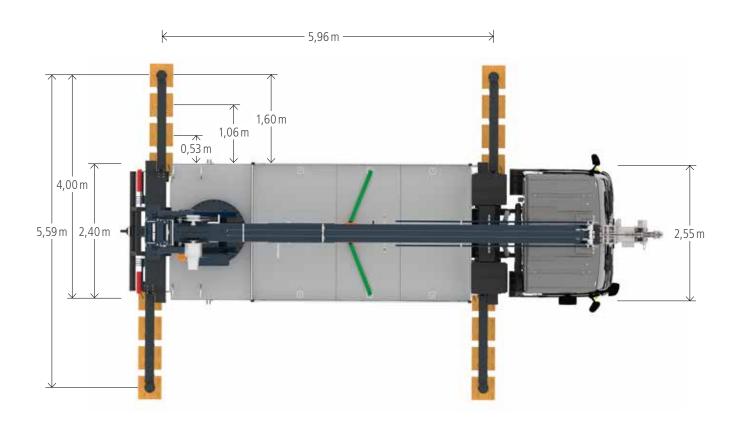



Grazebrook Industrial Park Hulbert Drive · Dudley West Midlands UK-DY2 0XW

Fon +44 (0)1384 476580 info@boecker.co.uk